



BALI
CATAMARANS



CATANA
CATAMARANS

GAMMES VOILE
SAILS RANGES
2024

CATANAGroup

BALI

CATAMARANS



| **BALI**
CATSMART



| **BALI**
CATSPACE



| 4.2



| 4.4



| 4.6



| 4.8



| 5.4



| 5.8



CATANA

CATAMARANS




CATANAgroup

CATSMART OPEN SPACE



BALI


CATSMART



Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Architecte d'intérieur / <i>Interior design</i>	PIATON - BERCAULT
Longueur hors tout / <i>Overall length</i>	11.78 m / 38' 7"
Longueur à la flottaison / <i>Waterline length</i>	11.20 m / 36' 9"
Largeur / <i>Beam</i>	6.46 m / 21' 2"
Surface utilisable / <i>Usable surface</i>	66 m ² / 710 sq ft
Tirant d'eau / <i>Draft</i>	1.10 m / 3' 7"
Déplacement à vide / <i>Light displacement</i>	8.4 t approx.
Déplacement en charge maxi / <i>maximum displacement</i>	12 t approx.
Surface maxi de voilure au près (GV à corne + Code 0)	100 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	1,076 sq ft
Motorisation / <i>Engines*</i>	2 x 19.6 cv jusqu'à 29 cv / 2 x 19.6 hp up to 29 hp
Carburant max / <i>Fuel max*</i>	2 x 200 l / 2 x 52.8 US Gal
Eau douce max / <i>Fresh water max*</i>	660 l / 174.3 US Gal
Eau noire / <i>Black water*</i>	2 x 55 l / 2 x 14.5 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	240 l / 8.47 cu ft
Nb de couchages / <i>N° of berths*</i>	4 / 12
CE CAT : A - 8 / B - 10 / C - 16 / D - 20 persons	


* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*

CATSMART OPEN SPACE

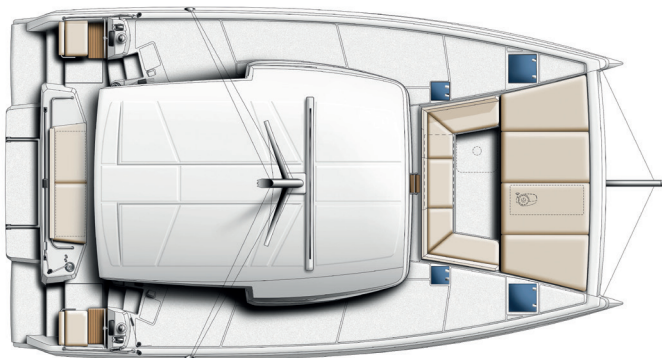


Pont + Flybridge / Deck + Flybridge



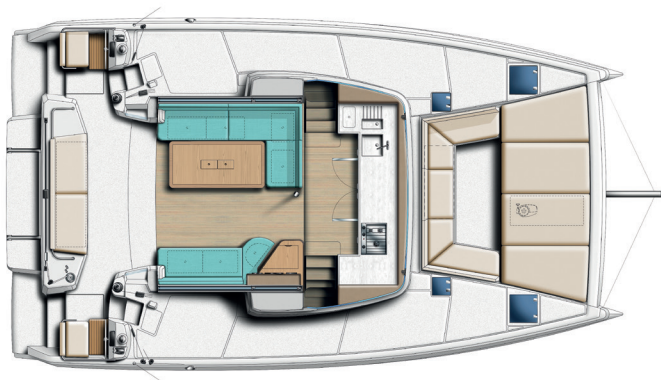


Nacelle + Pont / Saloon + Deck



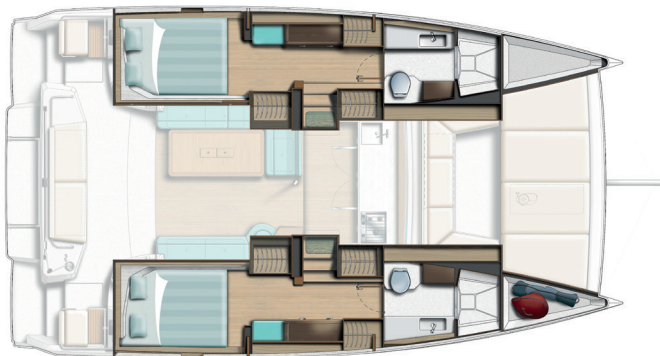


Version 2 cabines - 2 sdb / 2 cabins -2 heads version

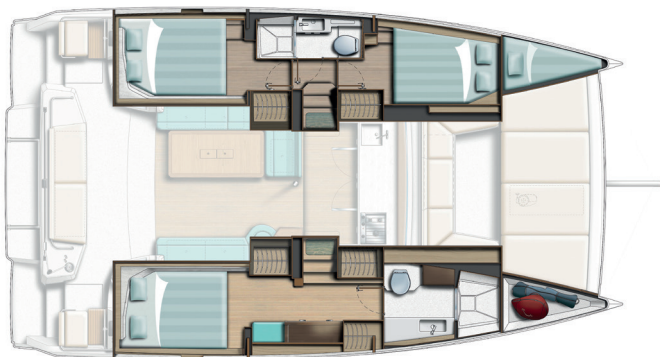

Version 3 cabines - 2 sdb / 3 cabins -2 heads version

CATSMART OPEN SPACE

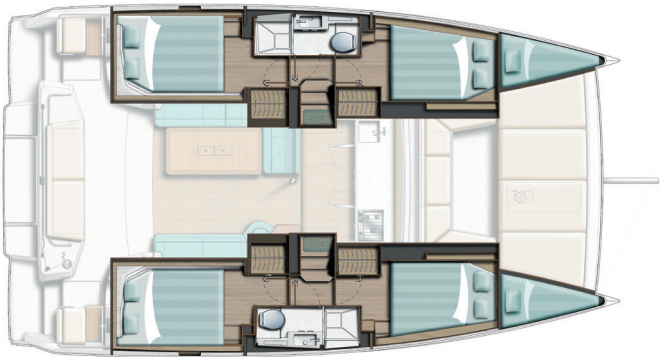

Version 4 cabins - 2 sdb / 4 cabins -2 heads version

Pack Excellence

- Ecological pack including freshwater purifying filter
- Combined battery charger 70 amp - Inverter 12V/220V - 1600VA
- Battery controller
- 2 extra service batteries of 12V - 130 amp
- Electrical winch for mainsail halyard, furler line and davit handling
- Automatic first and second reef
- Electric windlass 1000W
- Saloon manual tilting bay / door mechanically assisted by gaz struts
- Saloon to forward / cockpit opening window
- Sliding lateral windows
- Cockpit / saloon courtesy lighting
- Fridge freezer of 243L
- Gaz oven
- Aft bench seats (seats and backrests)
- Forward cockpit cushions (seats)
- Helmsman seat cushions (seats and backrests)
- Engine room & locker hatches on gaz struts
- Davit with system allowing lift of the dinghy
- Comfortable swim ladder with large handles and teak steps
- Extra Fresh water tank of 300L (for a total capacity of 660L)
- Extra gasoil tank of 200L (for a total capacity of 400L)
- Hot and cold cockpit shower
- Raymarine Electronic including : autopilot P70S,
GPS plotter AXIOM 7", MULTI I70S and VHF RAY 63
- 2 layers of antifouling with Epoxy base coat
- Safety equipment for 8 with liferaft (without EPIRB)
- Stickers on transom : name and port of registry of the boat
(to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 21 hp yanmar engines

- 2 cabins - 2 heads Version

.....

- 3 cabins - 2 heads Version

.....

- 4 cabins - 2 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

CATSPACE OPEN SPACE




BALI

CATSPACE



Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Lasta Design Studio
Longueur hors tout / <i>Overall length</i>	12,31 m / 40' 4"
Largeur / <i>Beam</i>	6,55 m / 21' 5"
Surface utilisable / <i>Usable surface</i>	70,4 m ² / 757.5 sq ft
Tirant d'eau / <i>Draft</i>	1,19 m / 3' 10"
Déplacement à vide / <i>Light displacement</i>	9.4 t approx.
Surface de voile standard (GV + Solent)	75 m ²
<i>Standard sail area (Mainsail + Solent)</i>	807 sq ft
Surface maxi de voilure au près (GV à corne + Code 0)	101 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	1,087 sq ft
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Non / No
Motorisation / <i>Engines*</i>	2 x 19.6 cv jusqu'à 37.5 cv / 2 x 19.6 hp up to 37.5 hp
Carburant max / <i>Fuel max*</i>	400 l / 105.6 US Gal
Eau douce max / <i>Fresh water max*</i>	760 l / 201 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	265 l / 9.36 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 10
CE CAT : A - 10 / B - 12 / C - 24 / D - 28 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*

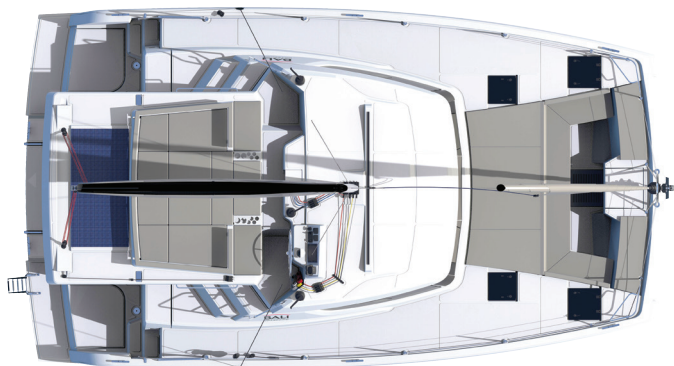


Pont + Flybridge / Deck + Flybridge



CATSPACE

OPEN SPACE

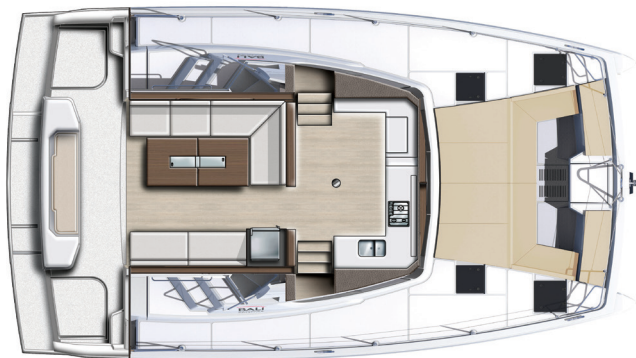


Nacelle + Pont / Saloon + Deck





CATSPACE

OPEN SPACE

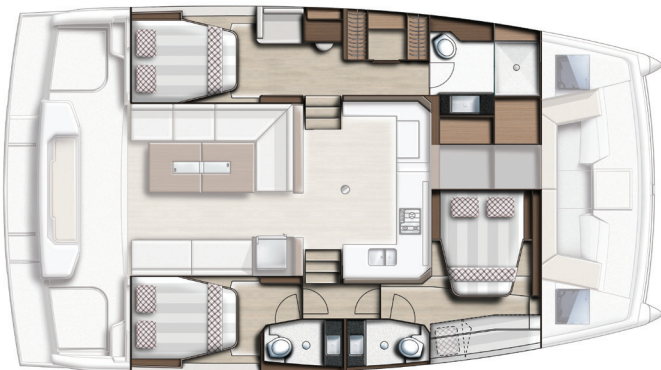

Version 3 cabines - 3 sdb / 3 cabins - 3 heads version

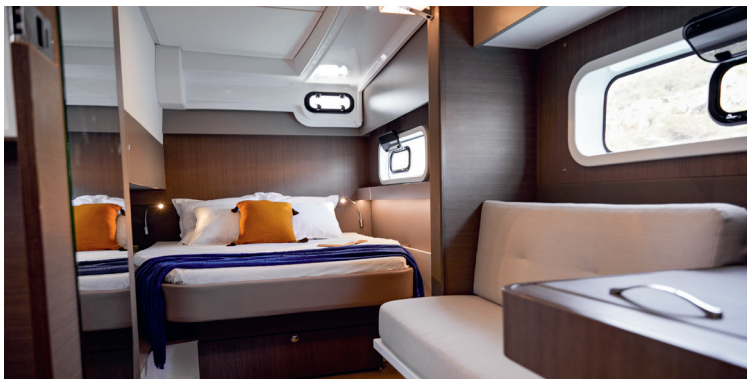

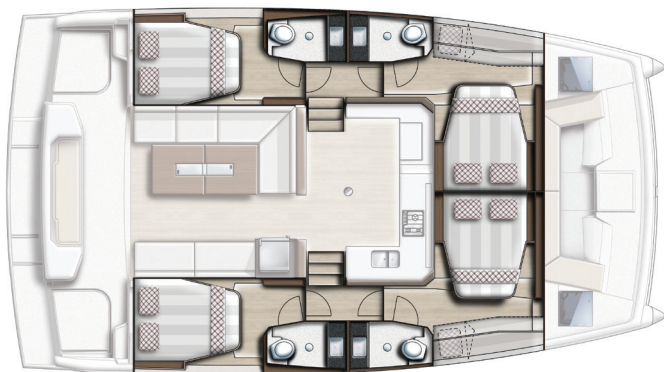

Version 4 cabines - 4 sdb / 4 cabins - 4 heads version





BALI
CATSPACE

Pack Specifications

Pack Excellence

- Cockpit/saloon courtesy lighting
- Opening porthole between steering station and saloon
- Fridge freezer 265L with dedicated inverter 230V
- Gaz oven
- Shelf in front cabine convertible into third berth
- Aft bench cushions (seats and backrests)
- Forward cockpit cushions (seats)
- Cushions for flybridge (seats and backrests)
- Helmsman seat cushions (seats and backrests)
- Engine room & locker hatches on gaz struts
- Davit with system allowing electrical lift of the dinghy
- Comfortable swim ladder with large handles and teak steps
- Extra Fresh water tank of 300L for a total capacity of 760L
- Hot and cold cockpit shower
- Raymarine Electronic including : autopilot P70S,
GPS plotter AXIOM 7", MULTI I70S and VHF RAY 63
- 2 layers of antifouling with Epoxy base coat
- Safety equipment for 8 with liferaft (without EPIRB and flares)
- Stickers on transom : name and port of registry of the boat
(to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 21 hp yanmar engines

- 3 cabins- 3 heads Version

.....

- 4 cabins - 4 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

BALI 4.2

OPEN SPACE



BALI 4.2

O P E N S P A C E




Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Longueur hors tout / <i>Overall length</i>	12,84 m / 42' 1"
Largeur / <i>Beam</i>	7,07 m / 23' 2"
Surface utilisable / <i>Usable surface</i>	79,2 m ² / 852 sq ft
Tirant d'eau / <i>Draft</i>	1,22 m / 4'
Déplacement à vide / <i>Light displacement</i>	11.4 t approx.
Déplacement en charge maxi / <i>maximum displacement</i>	16.4 t approx.
Surface de voile standard (GV + Solent)	90 m ²
<i>Standard sail area (Mainsail + Solent)</i>	<i>968 sq ft</i>
Surface maxi de voilure au près (GV à corne + Code 0)	117 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	<i>1,259 sq ft</i>
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 29 cv jusqu'à 47.5 cv / 2 x 29 hp up to 47.5 hp
Carburant max / <i>Fuel max*</i>	640 l / 169 US Gal
Eau douce max / <i>Fresh water max*</i>	860 l / 228 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	336 l / 11.87 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 12
CE CAT : A - 10 / B - 12 / C - 24 / D - 28 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*


BALI 4.2

OPEN SPACE

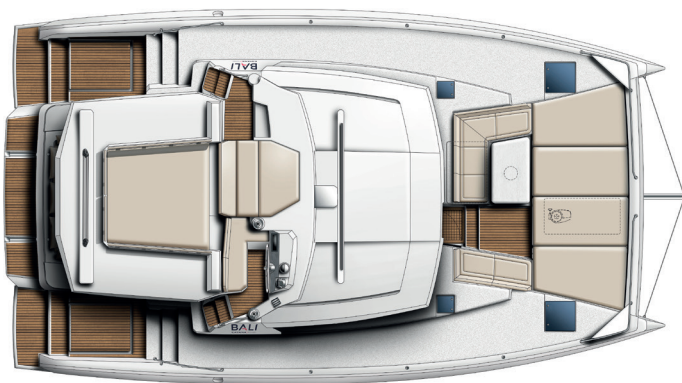


Pont et Flybridge (Teck en option) / Deck and Flybridge (Teak optional)



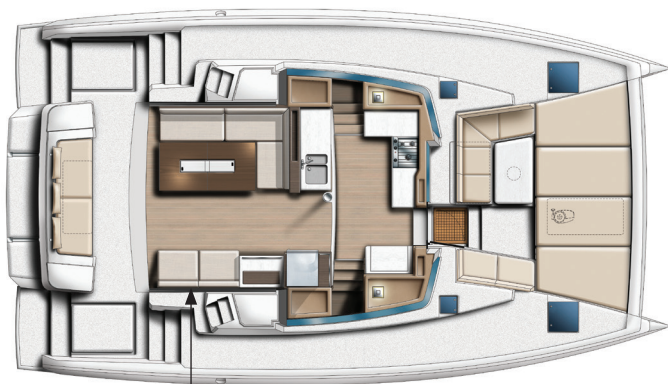

Nacelle (Fauteuils en option) /
Saloon (Optional armchairs)



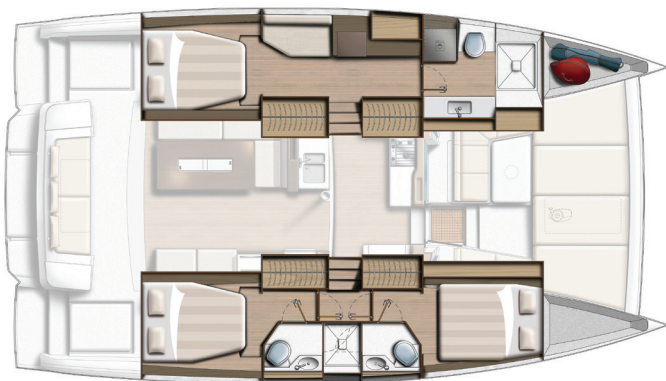


Version 3 cabines - 3 sdb (2 douches) / 3-cabins - 3-heads (2 showers) version



Version 3 cabines - 3 sdb (3 douches) / 3-cabins - 3-heads (3 showers) version



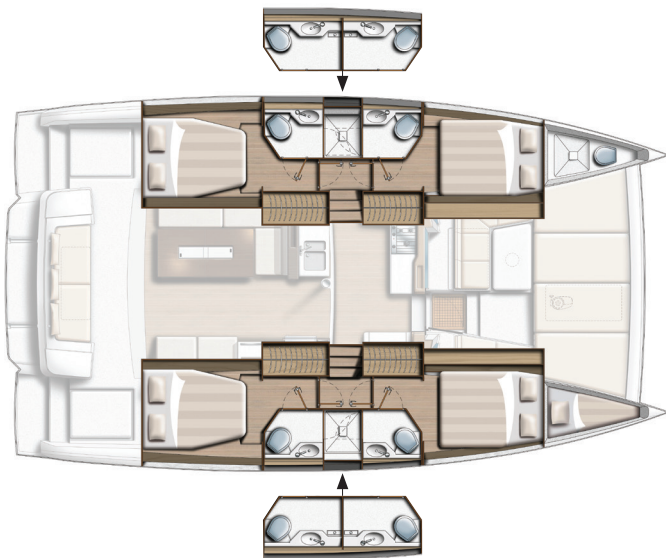

Version 4 cabines - 4 sdb (2 ou 4 douches) + Skipper (option)

4-cabins - 4-heads (2 or 4 showers) + skipper's (optional)





BALI 4.2

OPEN SPACE

Pack Specifications

Pack Excellence

- Freshwater purifying filter
- Combined battery charger 70 Amp - Inverter 12V/230V - 1600VA
- 2 extra service batteries of 130 amp
- Battery controller
- Fridge freezer 336L with chilled water
- Electrical winch (mainsail halyards, solent sheet, mainsheet, reefs and davits)
- Automatic first and second reef
- Stainless Steel pulpits with seats and solid hand rails
- Electric windlass 1000W
- Salon manual tilting bay/door mechanically assisted by pneumatic struts
- Lateral sliding windows
- Salon courtesy lighting
- Extra Fresh water tank of 400L for a total capacity of 860L
- Extra fuel tank of 320L for a total capacity of 640L
- Gaz oven
- High cupboards in kitchen
- Forward cockpit cushions (seats and backrests)
- Helmsman seat cushions (seat and backrest)
- Seats for aft bench (seats and backrests)
- Engine room & locker hatches on gaz struts
- Davit with system allowing electrical lift of the dinghy
- Comfortable swim ladder with large handles and teak steps
- Hot and cold cockpit shower
- Raymarine Electronic Pack 1 including : autopilot P70S, GPS plotter AXIOM 7", MULTI I70S and VHF RAY 63
- 2 layers of antifouling with Epoxy base coat
- Safety equipment for 8 with Life-raft (without EPIRB and flares)
- Stickers on transom : name and port of registry of the boat (to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 29 hp yanmar engines

- 3 cabins - 3 heads (2 central showers) Version

.....

- 3 cabins - 3 heads (3 showers) Version

.....

- 4 cabins - 4 heads (2 central showers) Version

.....

- 4 cabins - 4 heads (4 showers) Version

.....


- Pack Excellence

.....

- Pack Elegance

BALI 4.4

OPEN SPACE

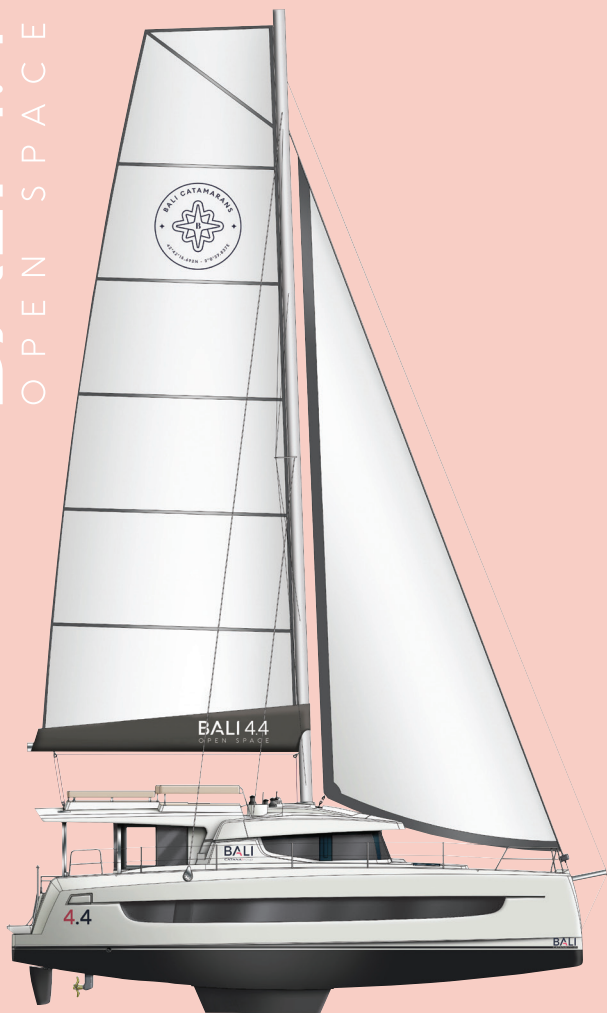

BALI 4.4


O P E N S P A C E

Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Longueur hors tout / <i>Overall length</i>	13,48 m / 44' 2"
Largeur / <i>Beam</i>	7,40 m / 24' 3"
Surface utilisable / <i>Usable surface</i>	87,9 m ² / 946 sq ft
Tirant d'eau / <i>Draft</i>	1,26 m / 4' 1"
Déplacement à vide / <i>Light displacement</i>	13.6 t approx.
Déplacement en charge maxi / <i>maximum displacement</i>	19.6 t approx.
Surface de voile standard (GV + Solent)	116 m ²
<i>Standard sail area (Mainsail + Solent)</i>	<i>1,248 sq ft</i>
Surface maxi de voilure au près (GV à corne + Code 0)	158 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	<i>1,700 sq ft</i>
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 37.5 cv jusqu'à 59 cv / 2 x 37.5 hp up to 59 hp
Carburant max / <i>Fuel max*</i>	800 l / 211 US Gal
Eau douce max / <i>Fresh water max*</i>	860 l / 228 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	615 l / 21.72 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 12
CE CAT : A - 12 / B - 14 / C - 24 / D - 38 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*


BALI 4.4

OPEN SPACE

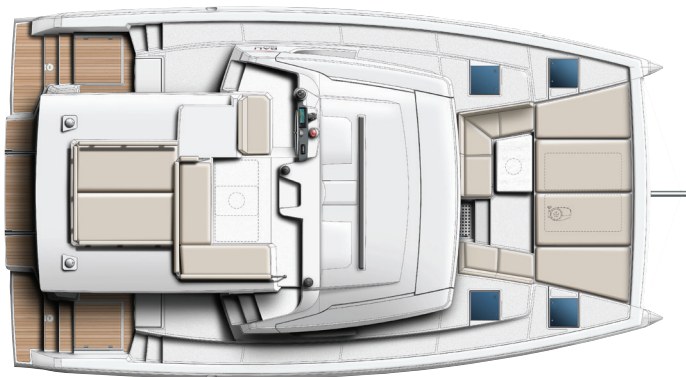

Pont et Flybridge / Deck and Flybridge
Pont teck en option / Optional Teak deck



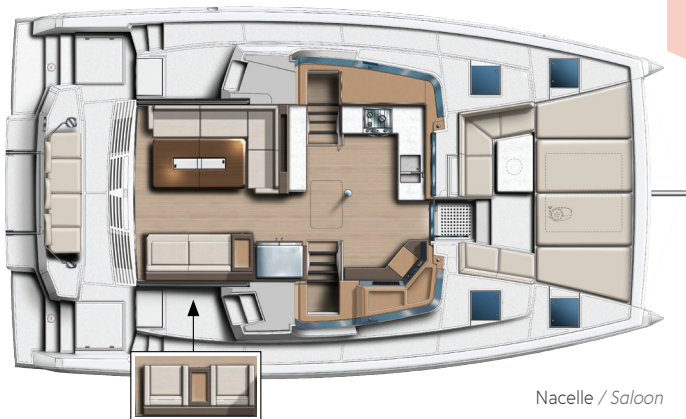


Fauteuils Club dans le Pack Elegance à la place de la meridienne
 Club Armchairs in Pack Elegance instead of meridienne




BALI 4.4

OPEN SPACE

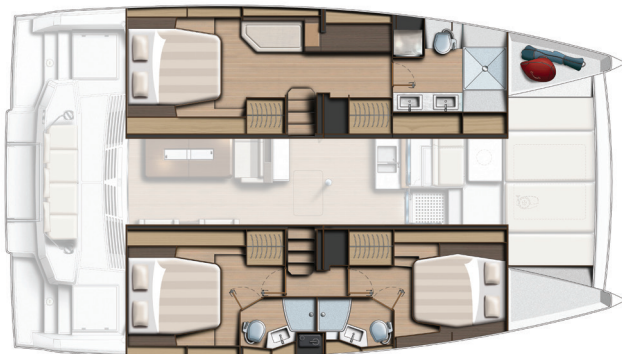

Version 3 cabines - 3 sdb / 3 cabins - 3 heads version



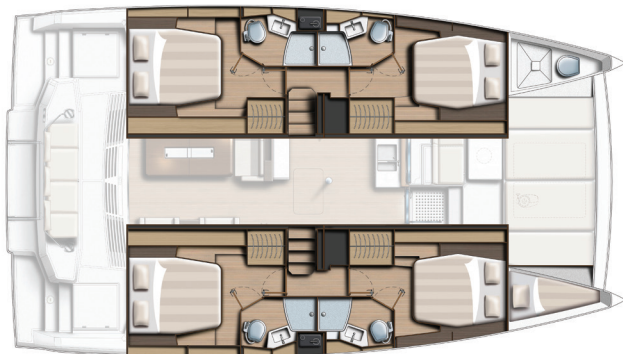

Version 4 cabins - 4 sdb + Skipper (option) / 4 cabins - 4 heads + Skipper (optional)





BALI 4.4

O P E N S P A C E

Packs Specifications

Pack Excellence

- Freshwater purifying filter
- Combined battery charger 80 Amp - Inverter 12V (or 24V)/230V - 2000VA
- 2 extra service batteries of 12V - 130 amp
- Battery controller
- Indirect lighting in cabins
- Forward cockpit and transom courtesy lighting
- Mainsail electrical winch
- Lifting system for dinghy
- Electric windlass 1000W
- Salon manual tilting bay/door mechanically assisted by pneumatic struts
- Hot and cold cockpit shower
- Comfortable swim ladder with large handles and teak steps
- Extra fuel tank of 400L for a total capacity of 800L
- Extra Fresh water tank of 400L for a total capacity of 860L
- Gaz oven
- Engine room & locker hatches on gaz struts
- Helmstation seat cushions (seat and backrest)
- Forward cockpit cushions (seats and backrests)
- Seats for aft bench (seats and backrests)
- 2 layers of antifouling with Epoxy base coat
- Raymarine Electronic PACK including : Pilote auto P70S, GPS plotter AXIOM 7", MULTI I70S, VHF RAY 63 + VHF RAY MIC at steering station, AIS receiver transmitter, full touch screen AXIOM 12" at steering station
- Stickers on transom : name and port of registry of the boat (to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 40 hp yanmar engines

- 3 cabins- 3 heads Version

.....

- 4 cabins - 4 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

BALI 4.6

OPEN SPACE



BALI 4.6

O P E N S P A C E




Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Longueur hors tout / <i>Overall length</i>	14,33 m / 47'
Largeur / <i>Beam</i>	7,66 m / 25' 1"
Surface utilisable / <i>Usable surface</i>	95,4 m ² / 1,027 sq ft
Tirant d'eau / <i>Draft</i>	1,27 m / 4' 2"
Déplacement à vide / <i>Light displacement</i>	13.8 t approx.
Surface de voile standard (GV + Solent)	116 m ²
<i>Standard sail area (Mainsail + Solent)</i>	1,248 sq ft
Surface maxi de voilure au près (GV à corne + Code 0)	156 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	1,679 sq ft
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 45 cv jusqu'à 57 cv / 2 x 45 hp up to 57 hp
Carburant max / <i>Fuel max*</i>	800 l / 211 US Gal
Eau douce max / <i>Fresh water max*</i>	860 l / 228 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	615 l / 21.72 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 12
CE CAT : A - 12 / B - 16 / C - 24 / D - 38 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*


BALI 4.6

OPEN SPACE

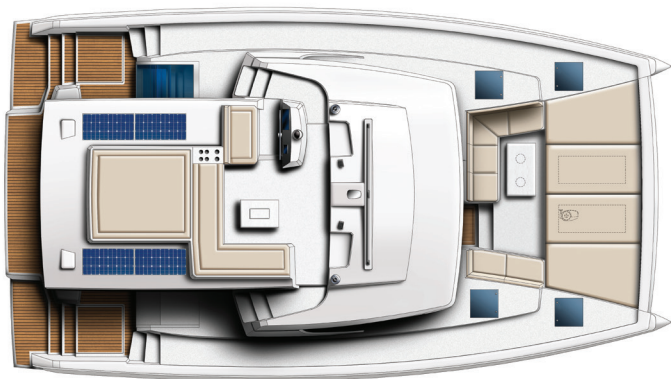

Pont et Flybridge / Deck and Flybridge
Pont teck en option / Optional Teak deck



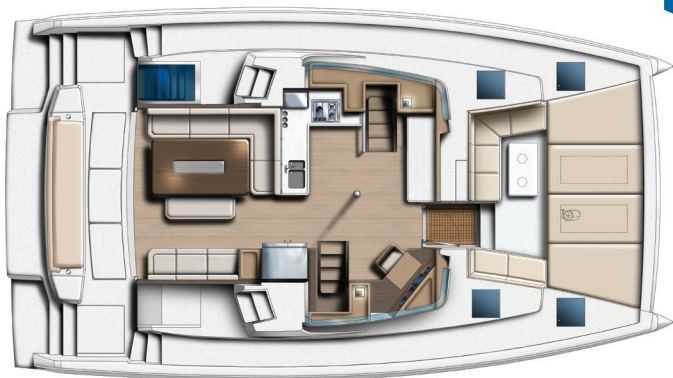


Nacelle / Saloon






BALI 4.6


OPEN SPACE

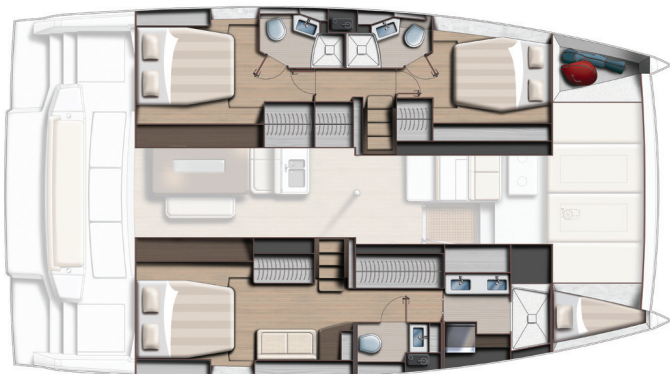

Version 3 cabines - 3 sdb + 1 single (option) / 3 cabins - 3 heads + 1 single (optional) version

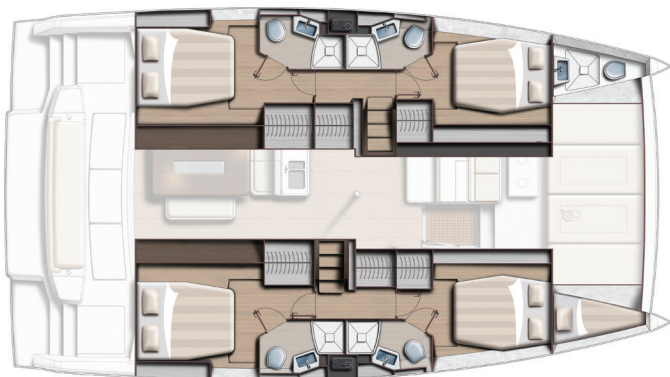

Version 4 cabines - 4 sdb symétriques + 2 singles (option) /
4 cabins - 4 heads symetrical + 2 singles (optional) version

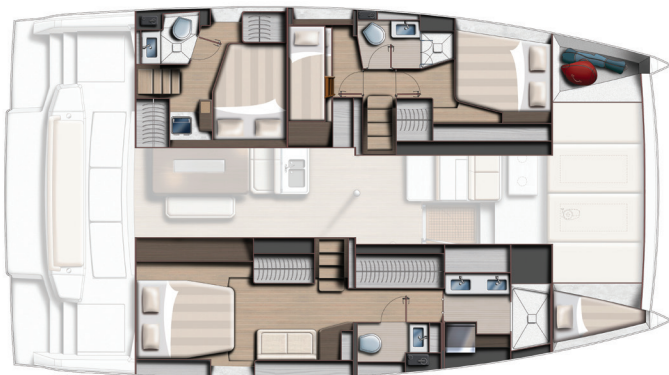

Version Propriétaire 4 cabines - 3 sdb + 1 single (option) /
 4 cabins - 3 heads Owner's + 1 single (optional) version



Version 5 cabines - 4 sdb + 2 singles (option) / 5 cabins - 4 heads + 2 singles (optional) version



BALI 4.6

OPEN SPACE **Packs Specifications**

Pack Excellence

- Freshwater purifying filter
- Combined battery charger 80 amp - Inverter 12V (or 24V)/230V - 2000VA
- 2 extra service batteries of 12V - 130 amp
- Battery controller
- House fridge freezer (615L) with chilled water, ice maker and dedicated inverter
- Indirect lighting in cabins
- Forward cockpit and transom courtesy lighting
- Mainsail electrical winch
- Lifting system for dinghy
- Electric windlass 1500W
- Hot and cold cockpit shower
- Comfortable swim ladder with large handles and teak steps
- Extra fuel tank of 400L for a total capacity of 800L
- Extra Fresh water tank of 400L for a total capacity of 860L
- Gaz oven
- Saloon tilting bay/door electrically assisted by hydraulic struts
- Engine room & locker hatches on gaz struts
- Helm station seat cushions (seat and backrest)
- Forward cockpit cushions (seats and backrests)
- Seats for aft bench (seats and backrests)
- 2 layers of antifouling with Epoxy base coat
- Raymarine Electronic PACK including : Pilote auto P70S, GPS plotter AXIOM 7", MULTI I70S, VHF RAY 63 + VHF RAY MIC at steering station, AIS receiver transmitter, full touch screen AXIOM 12" at steering station
- Stickers on transom : name and port of registry of the boat
(to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 45 hp yanmar engines

- 3 cabins (1 Starboard + 2 Portside) - 3 heads Version

.....

- 4 cabins (2 Starboard + 2 Portside) - 4 heads Version

.....

- 4 cabins (1 Starboard + 3 Portside) - 3 heads Version

.....

- 5 cabins (2 Starboard + 3 Portside) - 4 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

BALI 4.8

OPEN SPACE



BALI 4.8

O P E N S P A C E




Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Longueur hors tout / <i>Overall length</i>	14,92 m / 48' 11"
Largeur / <i>Beam</i>	7.88 m / 25' 10"
Surface utilisable / <i>Usable surface</i>	101,8 m ² / 1,095 sq ft
Tirant d'eau / <i>Draft</i>	1.36 m / 4' 5"
Déplacement à vide / <i>Light displacement</i>	14.9 t approx.
Surface de voile standard (GV + Solent)	126 m ²
<i>Standard sail area (Mainsail + Solent)</i>	1,356 sq ft
Surface maxi de voilure au près (GV à corne + Code 0)	179 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	1,926 sq ft
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 45 cv jusqu'à 80 cv / 2 x 45 hp up to 80 hp
Carburant max / <i>Fuel max*</i>	1000 l / 265 US Gal
Eau douce max / <i>Fresh water max*</i>	1120 l / 296 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	615 l / 21.72 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 14
CE CAT : A - 12 / B - 14 / C - 24 / D - 40 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*


BALI 4.8

OPEN SPACE

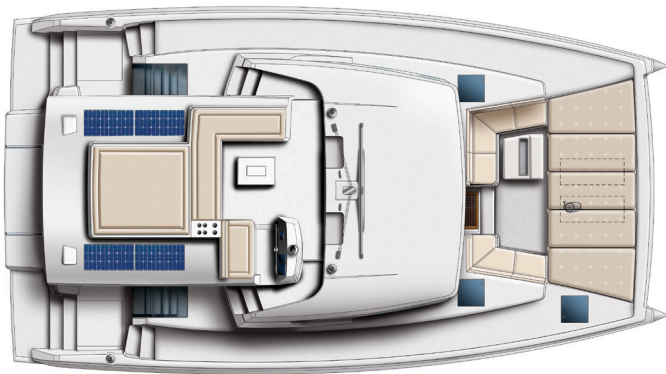

Pont et Flybridge / Deck and Flybridge



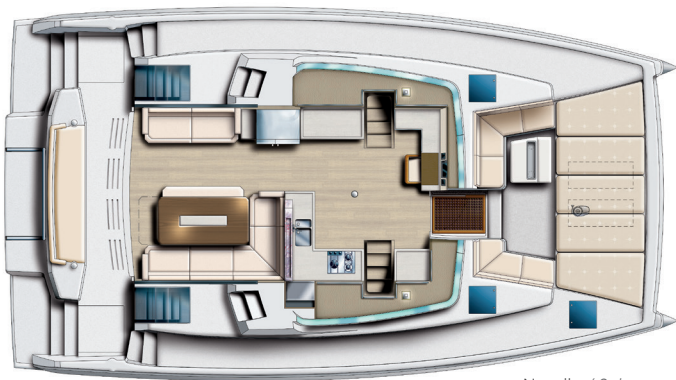

Nacelle / Saloon



©Leon&Salim

BALI 4.8

OPEN SPACE



Version 3 cabines - 3 sdb / 3 cabins - 3 heads version






Version Propriétaire 4 cabines - 4 sdb / 4 cabins - 4 heads Owner's version




BALI 4.8

OPEN SPACE

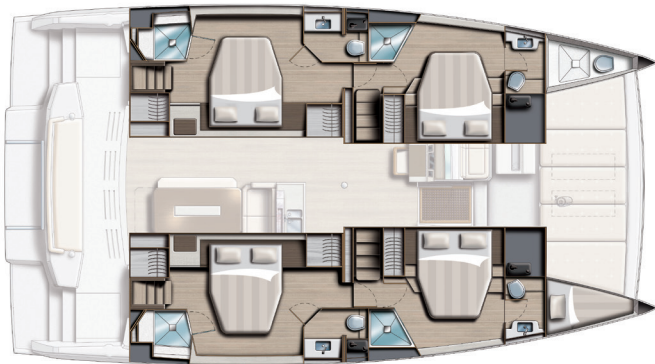

Version 4 cabines - 4 sdb symétriques / 4 cabins - 4 heads symmetrical version

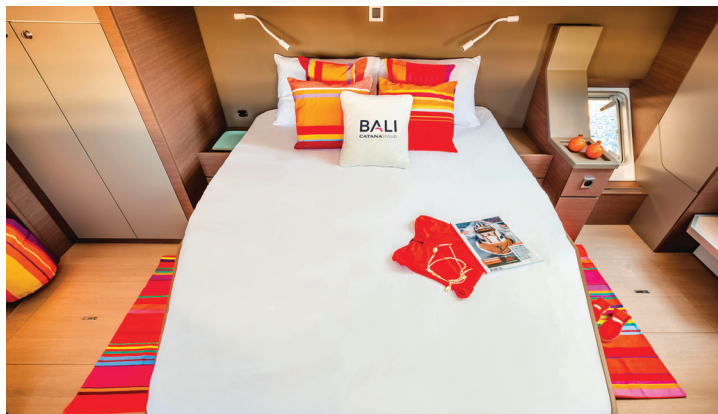

©A. Rizon



Version 5 cabines - 5 sdb / 5 cabins - 5 heads version



Version 6 cabines - 6 sdb / 6 cabins - 6 heads version

Pack Excellence

- Ecological pack including freshwater purifying filter
- Combined battery charger 80 amp - Inverter 12V (or 24V)/220V - 2000VA
- 2 extra service batteries of 12V - 130 amp
- Battery controller
- Indirect lighting in saloon/cockpit and cabins
- Forward cockpit and transom courtesy lighting
- Mainsail electrical winch
- Lifting system for dinghy
- Electric windlass 1700W
- Extra fuel tank of 400L for a total capacity of 1000L
- Extra Fresh water tank of 400L for a total capacity of 1120L
- Hot and cold cockpit shower
- Comfortable swim ladder with large handles and teak steps
- Gaz oven
- Saloon tilting bay/door electrically assisted by hydraulic struts
- Engine room & locker hatches on gaz struts
- Helmstation seat cushions (seats and backrests)
- Forward cockpit cushions (seats and backrests)
- Seats for aft bench (seats and backrests)
- 2 layers of antifouling with Epoxy base coat
- Raymarine Electronic PACK including : Pilote auto P70S, GPS plotter AXIOM 7", MULTI I70S, VHF RAY 63 + VHF RAY MIC at steering station, AIS receiver transmitter, 12" full touch screen at steering station
- Stickers on transom : name and port of registry of the boat (to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 45 hp yanmar engines

- 3 cabins (2 Starboard + 1 Portside) - 3 heads Version

.....

- 4 cabins (2 Starboard + 2 Portside) - 4 heads Version

.....

- 4 cabins (3 Starboard + 1 Portside) - 4 heads Version

.....

- 5 cabins (2 Starboard + 3 Portside) - 5 heads Version

.....

- 6 cabins (3 Starboard + 3 Portside) - 6 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

BALI 5.4

OPEN SPACE



BALI 5.4

O P E N S P A C E




Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAY
Longueur hors tout / <i>Overall length</i>	16,95 m / 55' 7"
Largeur / <i>Beam</i>	8,75 m / 28' 8"
Surface utilisable / <i>Usable surface</i>	128,3 m ² / 1,381 sq ft
Tirant d'eau / <i>Draft</i>	1,47 m / 4' 9"
Déplacement à vide / <i>Light displacement</i>	20.8 t approx.
Surface de voile standard (GV + Solent)	158 m ²
<i>Standard sail area (Mainsail + Solent)</i>	1,700 sq ft
Surface maxi de voilure au près (GV à corne + Code 0)	204 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	2,195 sq ft
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 57 cv jusqu'à 80 cv / 2 x 57 hp up to 80 hp
Carburant max / <i>Fuel max*</i>	1 200 l / 317 US Gal
Eau douce max / <i>Fresh water max*</i>	1 320 l / 349 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	615 l / 21.72 cu ft
Nb de couchages / <i>N° of berths*</i>	6 / 16
CE CAT : A - 16 / B - 16 / C - 24 / D - 40 persons	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*


BALI 5.4

OPEN SPACE

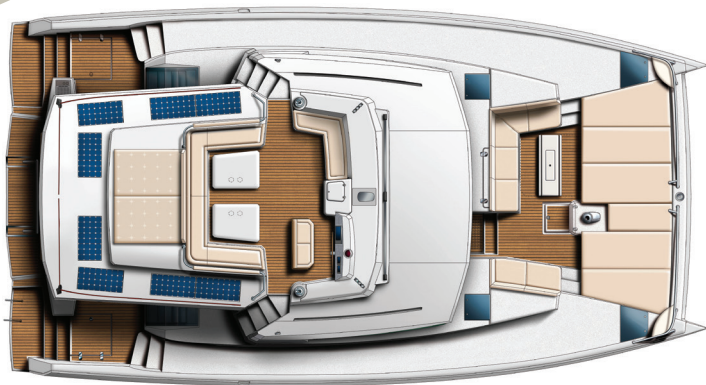

Pont et Flybridge / Deck and Flybridge (optional teak floor)



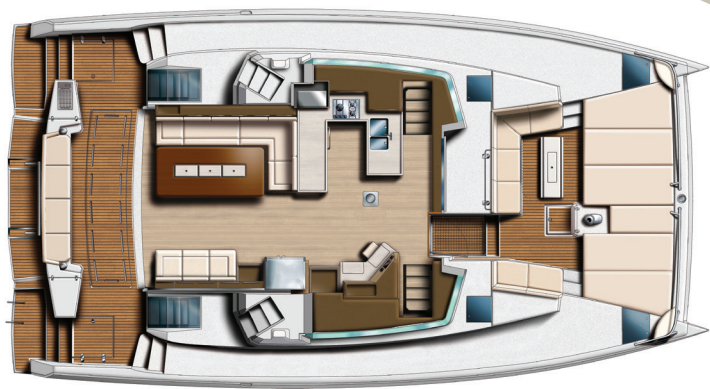


Nacelle / Nacelle (optional teak floor)



BALI 5.4

OPEN SPACE

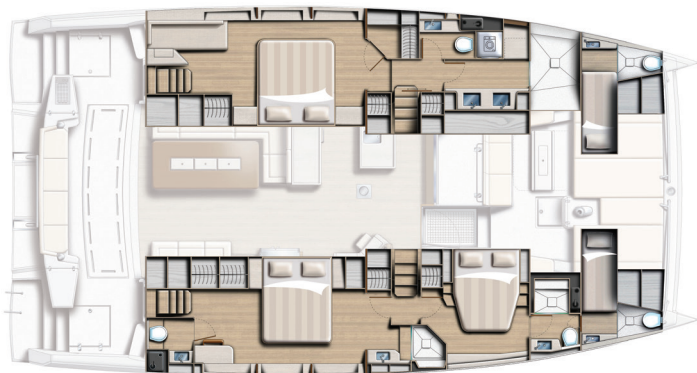


Version 3 cabines - 3 sdb + 2 skippers (option) / 3 cabins - 3 heads + 2 skippers (optional)



© Leon & Salim



Version 4 cabines - 4 sdb symétriques / 4 symmetrical cabins - 4 heads version

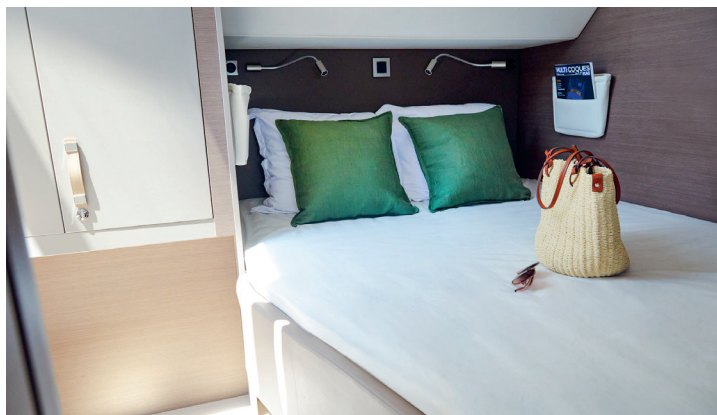

BALI 5.4

OPEN SPACE



Version 5 cabines - 5 sdb / 5 cabins - 5 heads




Version 5 cabines (option twin centrale) - 5 sdb / 5 cabins (twin central optional) - 5 heads

Option / Optional:



Version 6 cabines (twin arrière) - 6 sdb / 6 cabins (rear twin) - 6 heads

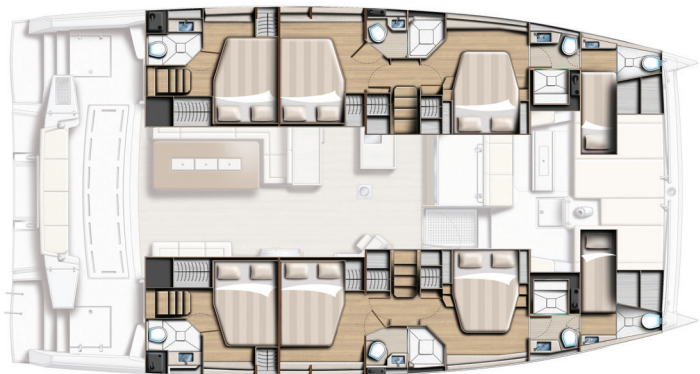

Version 6 cabines - 6 sdb + 2 skippers (option) / 6 cabins - 6 heads + 2 skippers (optional)

Option / Optional:



Version 6 cabines (twin centrale) - 6 sdb / 6 cabins (twin central) - 6 heads



BALI 5.4

O P E N S P A C E

Packs Specifications

Pack Excellence

- Freshwater purifying filter
- Combined battery charger 120 amp - Inverter 12V/230V - 3000VA
- Battery controller
- House fridge freezer (615L) with chilled water, ice maker and dedicated inverter
- Lifting system for dinghy
- Electric windlass 1700W
- 2 extra service batteries of 12V - 130 amp
- Indirect lighting in saloon/cockpit and cabins
- Forward cockpit and transom courtesy lighting
- Extra fuel tank of 600L for a total capacity of 1200L
- Extra Fresh water tank of 600L for a total capacity of 1320L
- Hot and cold cockpit shower
- Comfortable swim ladder with large handles and teak steps
- Saloon tilting bay/door electrically assisted by hydraulic struts
- Solent electrical winch
- Mainsail electrical winch
- Helm station seat cushions (seat and backrest)
- Forward cockpit cushions (seats and backrests)
- Seats for aft bench (seats and backrests)
- Gaz oven
- 2 layers of antifouling with Epoxy base coat
- Raymarine Electronic PACK including : Pilote auto P70S, GPS plotter AXIOM 7", MULTI I70S, VHF RAY 63 + VHF RAY MIC at steering station, AIS receiver transmitter, full touch screen AXIOM 12" at steering station
- Stickers on transom : name and port of registry of the boat (to be specified 2 months at the latest before delivery)



Tarif HT départ chantier / Ex-VAT Price (delivery at the yard):
Equipped with 2 x 57 hp yanmar engines

- 3 cabins (2 Starboard + 1 Portside) - 3 heads Version

.....

- 4 cabins (2 Starboard + 2 Portside) - 4 heads Version

.....

- 4 cabins (3 Starboard + 1 Portside) - 4 heads Version

.....

- 5 cabins (3 Starboard + 2 Portside) - 5 heads Version

.....

- 6 cabins (3 Starboard + 3 Portside) - 6 heads Version

.....

- Pack Excellence

.....

- Pack Elegance

BALI 5.8

OPEN SPACE



BALI 5.8

O P E N S P A C E




Conception	Olivier PONCIN
Architecte Naval / <i>Naval Architect</i>	Xavier FAÏ
Design intérieur / <i>Designer</i>	Piaton Bercault Yacht Design
Longueur hors tout / <i>Overall length</i>	17,65 m / 58'
Largeur / <i>Beam</i>	9,06 m / 29' 8"
Surface utilisable / <i>Usable surface</i>	139,5 m ² / 1,501 sq ft
Tirant d'eau / <i>Draft</i>	1,47 m / 4' 10"
Déplacement à vide / <i>Light displacement</i>	24.9 t / 54,957 lbs approx.
Surface de voile standard (GV + Solent)	179m ²
<i>Standard sail area (Mainsail + Solent)</i>	<i>1,926 sq ft</i>
Surface maxi de voilure au près (GV à corne + Code 0)	238 m ²
<i>Maximum upwind sail area (Square top mainsail + Code 0)</i>	<i>2,561 sq ft</i>
Flybridge	Oui / Yes
Porte cockpit avant / <i>Forward cockpit door</i>	Oui / Yes
Motorisation / <i>Engines*</i>	2 x 80 cv jusqu'à 115 cv / 2 x 80 hp up to 115 hp
Carburant max / <i>Fuel max*</i>	1 200 l / 317 US Gal
Eau douce max / <i>Fresh water max*</i>	1 320 l / 349 US Gal
Réfrigérateur + Congélateur max / <i>Fridge + Freezer max*</i>	634 l / 22.39 cu ft
Nb de couchages / <i>N° of berths*</i>	8 / 14
CE CAT : A - 16 / B - 16 / C - 24 / D - 40 persons (En cours / <i>Pending</i>)	

* Equipement selon Pack et options choisis / *Equipment according to chosen Pack and options*

BALI 5.8


OPEN SPACE

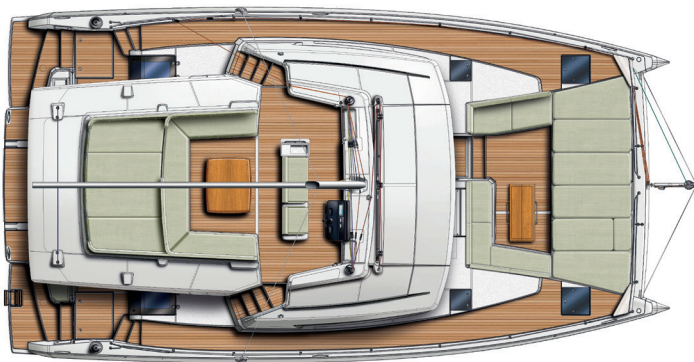

Pont et Flybridge / Deck and Flybridge (optional teak floor)



OPTION /OPTIONAL

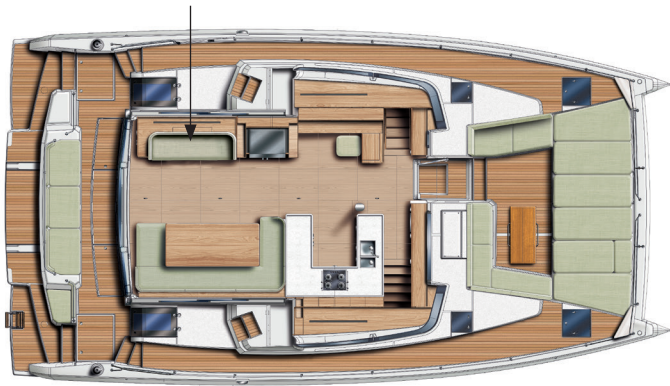

Nacelle / Nacelle (optional teak floor)



BALI 5.8

OPEN SPACE




OPTION / OPTIONAL

Version 3 cabines (2 masters) - 3 sdb + Double skipper / 3 cabins (2 masters) - 3 heads + Double skippers




© Berco

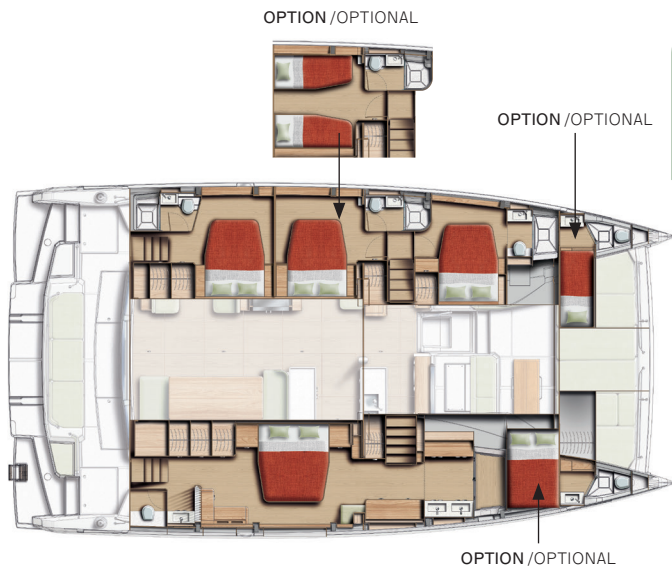


Version 4 cabines (1 master) - 4 sdb + 2 skippers / 4 cabins (1 master) - 4 heads version + 2 skippers



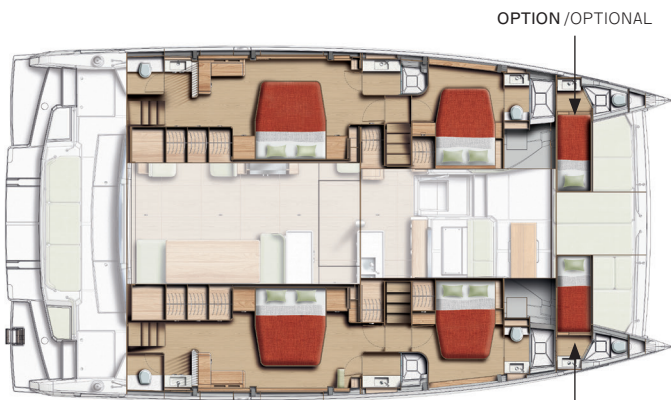

Version 4 cabines (2 masters) - 4 sdb + 2 skippers / 4 cabins (2 masters) - 4 heads + 2 skippers

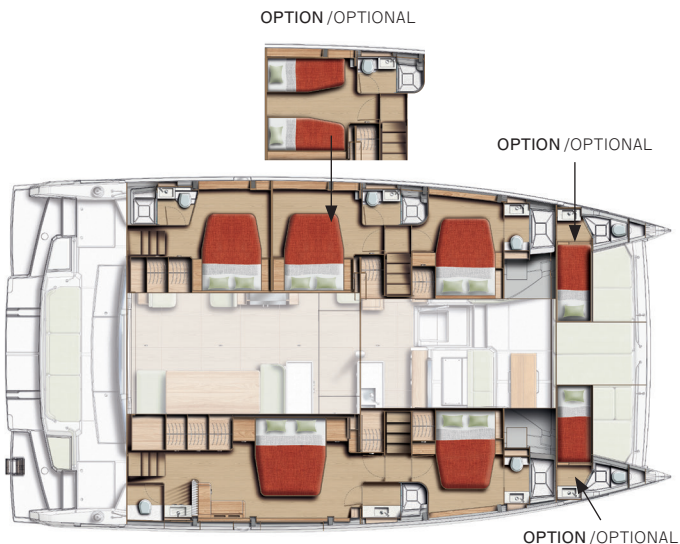


Version 5 cabines (1 master) - 5 sdb + 2 skippers / 5cabins (1 master) - 5 heads + 2 skippers


BALI 5.8

OPEN SPACE


OPTION / OPTIONAL



OPTION / OPTIONAL

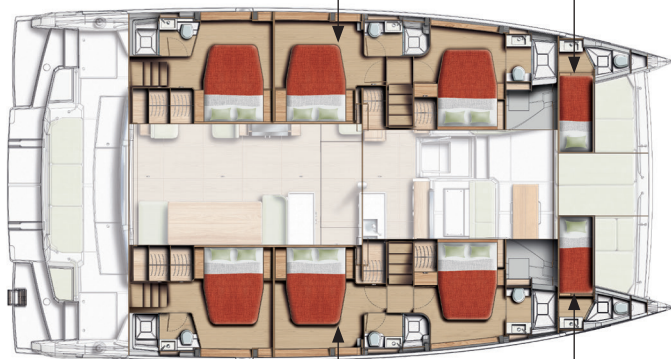

OPTION / OPTIONAL



OPTION / OPTIONAL

Version 6 cabins - 6 sdb + 2 skippers / 6 cabins - 6 heads version + 2 skippers



Procédé de fabrication Structure intégrale

Les liaisons coque / pont / cloisons sont assurées par un collage et un corniérage structurel localement en 100% fibre de carbone comme pour les cloisons principales et épontilles. L'ensemble de l'enveloppe coque/pont constitue une structure monobloc, indéformable d'une rigidité et d'une longévité exceptionnelle.

Structure et finition

- Coques et pont en sandwich PVC tissus verre et carbone infusé résine Vinylester et qualité anti osmotique.
- Roof, renforts de cadènes et renforts oméga de coque et de pont en tissus carbone imprégnés en résine Vinylester.
- Cloisons structurelles principales (sandwich PVC tissus carbone) infusées à la résine Vinylester.
- Fonds de cales peint en gris clair.
- Finition de coque en gel coat Gris
- Finition sous nacelle mate.
- Finition sous nacelle bord d'attaque et poutre AR en brillant.
- Pont en gel coat blanc avec antidérapant intégré.
- Dérives foils C53 dans puits composite coulissant sur palier en PTFE.
- Liaison coque pont par collage avec reprise par stratification aux zones de contraintes (bord d'attaque, cadènes, poutre et poutre de compression, taquets).

Building process

The hull Mould is composed of three main parts with parting lines at the bottom junctions. Mould of the Platform and half-inner hulls is in one part to warranty the maximum of rigidity. The hull has a grey or white gelcoat finish.

The hull is built in foam sandwich infusion, with Vinylester and Polyester resin. The structure is reinforced with monolithic areas, Twaron® Impact process Aramid fiber and full carbon fiber areas like shroud chain plates, and horizontal stiffening spars.

The deck has a white gelcoat finish the deck is also made in foam sandwich infusion with monolithic / plywood reinforcements. Numerous areas are made in full carbon fiber: The roof and its stiffening, deck stiffening spars, mast foot area and mast pillar.

Structural main bulkheads are made in infusion Foam/Carbon sandwich. To provide the best toughness, every opening (doors and technical holes) are integrated and reinforced during the infusion process.

Structural integrity

The hull/deck/Bulkheads joint is glued and continuously laminated. Full carbon fiber lamination joint is applied for the main bulkheads and floor frames.

The hull and deck are as solid as though they were cast in one piece, guarantying an outstanding strength and lifespan.

OCEAN CLASS






CATANA

CATAMARANS

Conception	Olivier PONCIN
Architecte / Architect	Chantier CATANA
Longueur hors tout / Overall length	15,75 m / 51.67 ft
Largeur / Beam	7,83 m / 25.69 ft
Longueur de coque / Hull length	14,99 m / 49.18 ft
Tirant d'eau, dérives hautes / Draft Boards up	1,17 m / 3.83 ft
Tirant d'eau, dérives basses / Draft Boards down	2,49 m / 8.16 ft
Déplacement / Displacement	12.7 t / 19.5 t approx.
Tirant d'air / Mast clearance	22,50 m / 73.82 ft
Surface de voilure au près maxi	177 m ²
Maximum upwind sail area*	1,905 sq ft
Surface de GV / Mainsail area*	92 m ² / 990 sq ft
Surface de Génois / Genoa area*	65 m ² / 699 sq ft
Surface de Solent / Solent area*	50 m ² / 538 sq ft
Surface de Gennaker / Gennaker area*	115 m ² / 1,237 sq ft
Surface de Code 0 / Code 0 area*	85 m ² / 915 sq ft
Eau douce / Fresh water*	800 l / 211 US Gal
Fuel*	800 l / 211 US Gal
Réfrigérateur / Refrigerator *	267 l / 9.43 cu ft
Congélateur / Freezer*	98 l / 3.46 cu ft
Motorisation / Engines* 2 x 45 cv jusqu'à 57 cv / 2 x 45 hp up to 57 hp	
CE CAT : A (en cours / Pending)	

* Equipement selon Pack et options choisis / Equipment according to chosen Pack and options


OCEAN CLASS

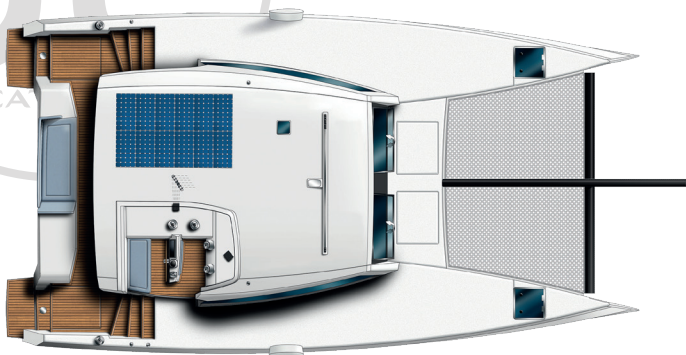

Pont
Deck




OCEAN CLASS

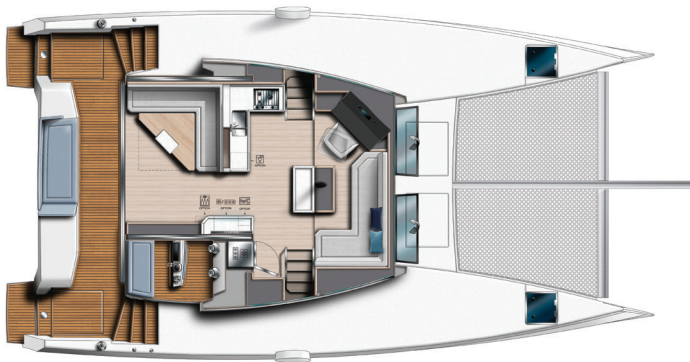

Nacelle
Nacelle



OCEAN CLASS

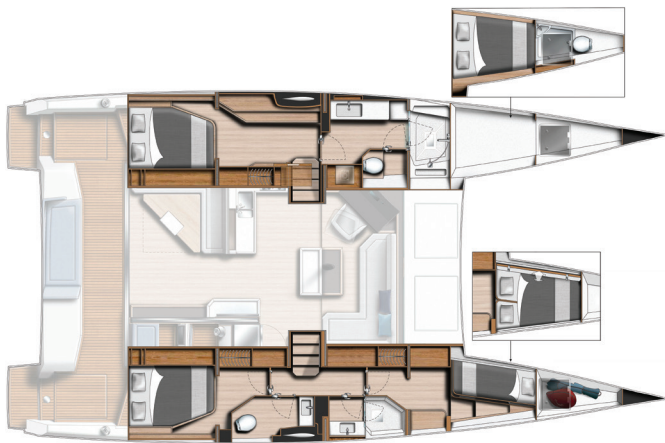

Version propriétaire 3 Cabines / 2 sdb + skipper (Option)

Owner version 3 Cabin / 2 heads + skipper (Optional)




Version propriétaire 3 Cabines / 3 sdb

Owner version 3 Cabin / 3 heads




OCEAN CLASS

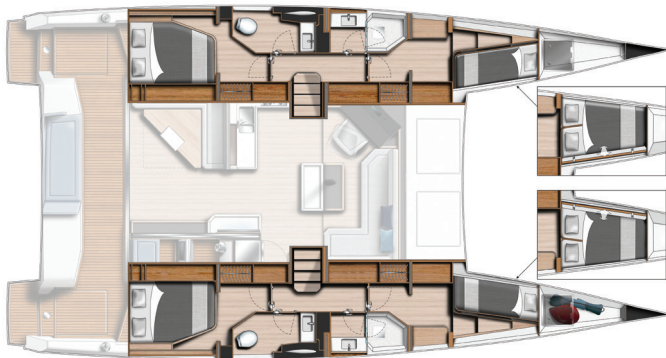

Version 4 Cabines / 2 sdb

Version 4 Cabin / 2 heads

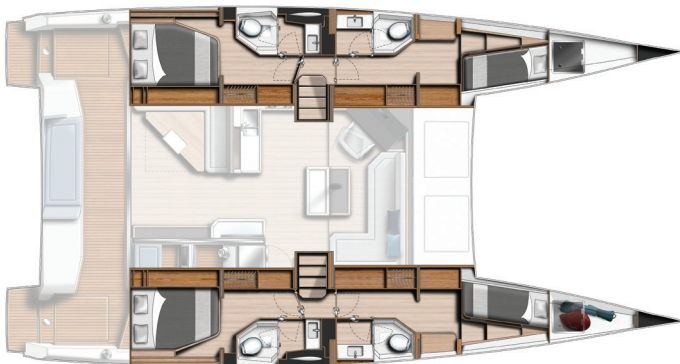

Version 4 Cabines / 4 sdb

Version 4 Cabin / 4 heads



BALI CATAMARANS - CHANTIER CATANA

ZONE TECHNIQUE DU PORT

66140 CANET EN ROUSSILLON - FRANCE

info@catanagroup.com

www.bali-catamarans.com

www.catana.com



CATANAGroup